

TeraSPEED® Indoor/Outdoor, Single Jacket All-Dielectric, Riser Rated, Gel-Free, Stranded Loose Tube Cable


Product Classification

Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Regional Availability	Asia Australia/New Zealand EMEA Latin America North America

Standards And Qualifications

Cable Qualification Standards	ANSI/ICEA S-104-696 EN 187105 Telcordia GR-409
--------------------------------------	--

Representative Image

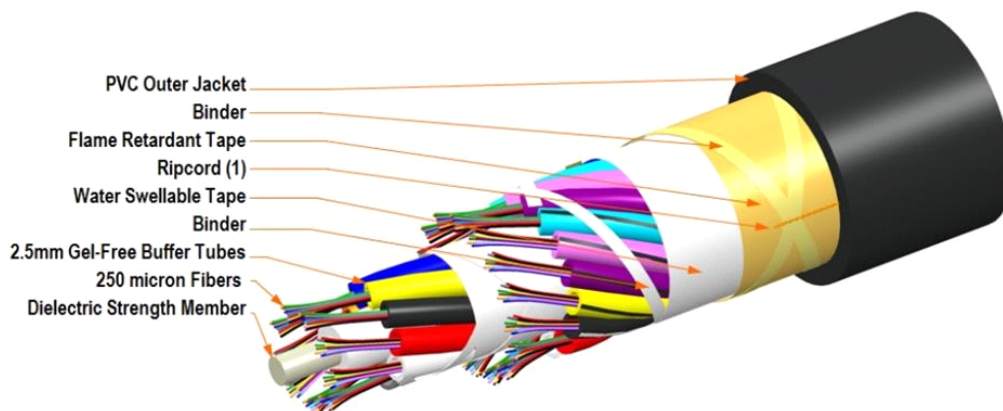

General Specifications

Construction Type	Non-armored
Cable Type	Stranded loose tube
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	G.652.D and G.657.A1 , TeraSPEED® OS2
Total Fiber Count	24
Fiber Type	G.652.D and G.657.A1, TeraSPEED® OS2
Fiber Type, quantity	24
Fibers per Subunit, quantity	12
Jacket Color	Black

Jacket UV Resistance UV stabilized

Dimensions

Buffer Tube/Subunit Diameter 2.50 mm | 0.10 in
Cable Weight 118.0 kg/km | 79.0 lb/kft
Diameter Over Jacket 11.50 mm | 0.45 in
Filler, quantity 3
Subunit, quantity 2

Physical Specifications

Minimum Bend Radius, loaded 17.3 cm | 6.8 in
Minimum Bend Radius, unloaded 11.5 cm | 4.5 in
Tensile Load, long term, maximum 180 lbf | 800 N
Tensile Load, short term, maximum 2700 N | 607 lbf
Vertical Rise, maximum 692.0 m | 2270.3 ft

Flame Test Specifications

Flame Test Listing NEC OFNR (ETL) and c(ETL)
Flame Test Method UL 1666

Environmental Specifications

Environmental Space Riser
Installation Temperature -30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature -40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature -40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression 125 lb/in | 22 N/mm
Compression Test Method FOTP-41 | IEC 60794-1 E3
Flex 35 cycles
Flex Test Method FOTP-104 | IEC 60794-1 E6
Impact 2.17 ft lb | 2.94 N-m
Impact Test Method FOTP-25 | IEC 60794-1 E4
Strain See long and short term tensile loads
Strain Test Method FOTP-33 | IEC 60794-1 E1
Twist 10 cycles
Twist Test Method FOTP-85 | IEC 60794-1 E7
Water Penetration 24 h

Water Penetration Test Method FOTP-82 | IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C 28 °F
Cable Freeze Test Method	FOTP-98 IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-8W-IOLT (Product Component—not orderable) — TeraSPEED® OS2 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable