

OTE200-04MX-14-S12-B-W



Mini-OTE 200-Series, Optical Terminal Enclosure, 4-port mini-size connector (DLX®), 1:4 splitter, black, wall mount

- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Functionality to splice and store feeder cable in the field with the possibility to splice in the field two extra branch cables
- Hardened adapters are factory-terminated and environmentally sealed to ensure rapid plug-and-play drop cable installations
- Integrated external cable fixation guarantees easy, fast and reliable cable manipulations

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America |
| Product Type | Access terminal, with splitter |
| Product Brand | DLX® |
| Product Series | Mini-OTE 200 |

General Specifications


| | |
|---------------------------|------------------------|
| Cable Type | No cable (stubless) |
| Cable, quantity | 0 |
| Distribution Type | 1 x 4 splitter |
| Enclosure Color | Black |
| Mounting | Handhole Pole Wall |
| Port Type | Hardened mini-size DLX |
| Port, quantity | 4 |
| Splitter, quantity | 1 |
| Stub Type | No tail |

Dimensions


| | |
|---------------------------|----------------------|
| Height | 358.5 mm 14.114 in |
| Width | 166 mm 6.535 in |
| Depth | 129.3 mm 5.091 in |
| Cable Length, stub | 0 ft (0 m) |

Dimension Drawing

OTE200-04MX-14-S12-B-W

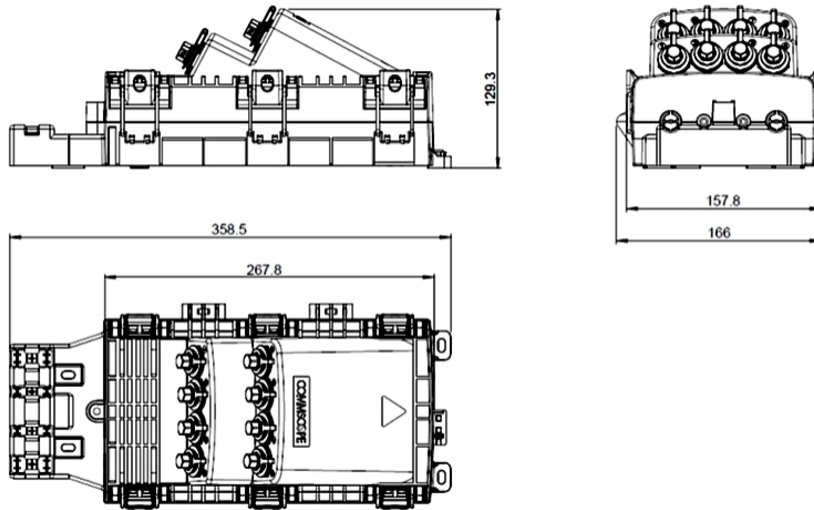

Ordering Tree

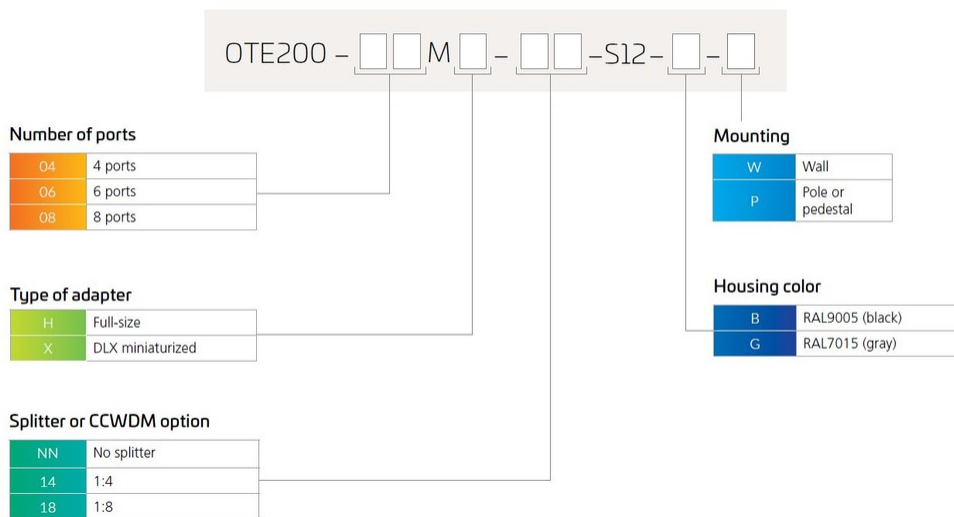

Material Specifications

Enclosure Material Type

Glass filled polypropylene (GF-PP)

Optical Specifications

Fiber Type

G.652.D

Operating Wavelength Range

1260 – 1635 nm

Attenuation Splitter, maximum

7.1 dB

OTE200-04MX-14-S12-B-W

| | |
|--|---------|
| Attenuation Terminal Connectors, maximum | 0.4 dB |
| Directivity, minimum | 60 dB |
| Insertion Loss, Splitter, typical | 6.7 dB |
| Insertion Loss, Terminal Connector, typical | 0.16 dB |
| Return Loss, Connector, minimum | 65 dB |
| Return Loss, Single Ports, minimum | 55 dB |

Environmental Specifications

| | |
|--------------------------------|--------------------------------------|
| Operating Temperature | -40 °C to +65 °C (-40 °F to +149 °F) |
| Relative Humidity | 5%–100%, condensing |
| Environmental Space | Above ground Below ground Buried |
| Qualification Standards | IEC 60529, IP68 + 3 m waterhead |
| UV Resistance | UV stabilized |

Packaging and Weights

| | |
|---------------------------|--|
| Included | Cable termination unit (2) Enclosure (1) Fiber pigtail cassette (1) Optical splitter (1) Splice Cassette (2) |
| Packaging quantity | 1 |
| Packaging Type | Box Carton |


Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

Included Products

CW8094-002 – TENIO™ Cable Termination Unit kit
TENIO-CTU-L-(10)

TENIO™ Cable Termination Unit kit



Product Classification

| | |
|------------------------------|-----------------------|
| Regional Availability | EMEA |
| Product Type | Cable termination kit |
| Product Series | TENIO |

Environmental Specifications

| | |
|----------------------------|---------|
| Environmental Space | Outdoor |
|----------------------------|---------|

Packaging and Weights

| | |
|---------------------------|--------------|
| Packaging quantity | 1 |
| Packaging Type | Bag Carton |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|---|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

