### UQXQXLCJ8

#### **Base Product**



Ultra Low Loss (ULL) OM4 MPO8 (Pinned) to LC/UPC, Fiber Extension Cable Assembly, 8-Fiber, Plenum

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

**Product Type** Fiber array cable assembly

Product Brand SYSTIMAX ULL

**Ordering Note**For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Color, boot A Gray

Color, connector A Aqua

Color, boot B Aqua

Color, connector B Beige

Construction Type Stranded

Furcation Color Aqua

Interface, Connector A MPO-08/UPC Male

Interface, Connector B LC/UPC

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity

Total Fibers, quantity 8

Dimensions




## UQXQXLCJ8

**Breakout Length** 12 in | 24 in | 36 in | 48 in | 60 in | 72 in

Cable Assembly Length Range (m) 1 - 304Cable Assembly Length Range (ft) 2 - 999

### Ordering Tree

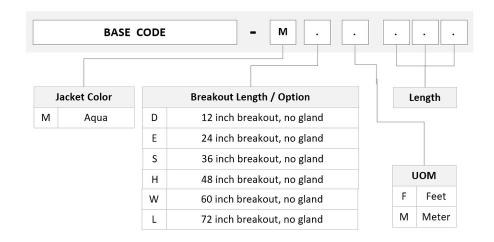

#### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

**Fiber Type** OM4, LazrSPEED®

### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C}$  to  $+60 \,^{\circ}\text{C}$  (+14  $^{\circ}\text{F}$  to +140  $^{\circ}\text{F}$ )

Environmental Space Indoor | Plenum

#### Regulatory Compliance/Certifications

Agency Classification
ANATEL Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



# UQXQXLCJ8





#### Included Products

760074997 P-012-MP-5K-F30AQ

860633308

860637425

 Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 12 fiber, Multimode OM4, Feet jacket marking, Aqua jacket color

MPO8, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mLC/UPC Connector, Multimode, Beige, Short Boot

