



Fiber OSP cable, LightScope ZWP® Single Jacket/Single Armor, 288 fiber, Gel-Free, Stranded Loose Tube, Singlemode G.652.D and G.657.A1, Feet jacket marking, Black jacket color

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection
- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber OSP cable |
| Product Series | D-LA |
| Government Funding | Build America Buy America (BABA) compliant* |


General Specifications

| | |
|-------------------------------------|---------------------|
| Armor Type | Corrugated steel |
| Cable Type | Stranded loose tube |
| Construction Type | Armored |
| Subunit Type | Gel-free |
| Jacket Color | Black |
| Jacket Marking | Feet |
| Subunit, quantity | 24 |
| Fibers per Subunit, quantity | 12 |
| Total Fiber Count | 288 |

Dimensions

| | |
|-------------------------------------|--------------------|
| Buffer Tube/Subunit Diameter | 2.5 mm 0.098 in |
| Diameter Over Jacket | 19.6 mm 0.772 in |

Representative Image

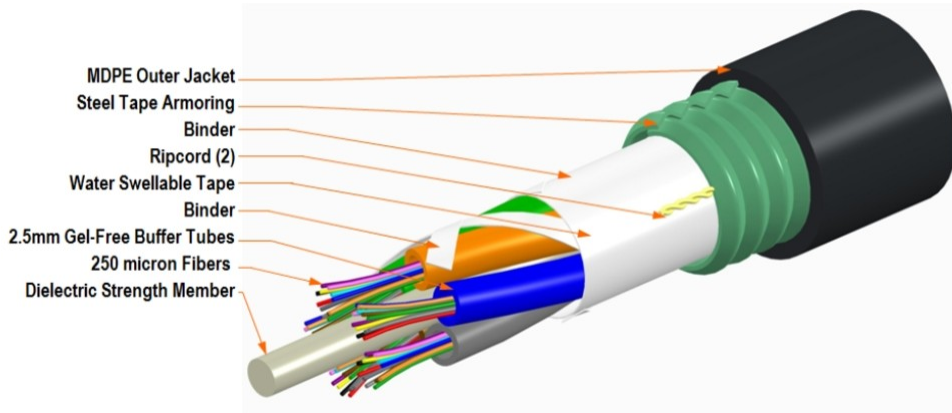

Material Specifications

Jacket Material PE

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 294 mm 11.575 in |
| Minimum Bend Radius, unloaded | 196 mm 7.717 in |
| Tensile Load, long term, maximum | 800 N 179.847 lbf |
| Tensile Load, short term, maximum | 2700 N 606.984 lbf |
| Compression | 44 N/mm 251.246 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 25 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 6.62 N-m 58.592 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 304 m 997.375 ft |

Optical Specifications

Fiber Type G.652.D and G.657.A1 | G.652.D and G.657.A1

Environmental Specifications

| | |
|--------------------------------------|--------------------------------------|
| Installation temperature | -30 °C to +70 °C (-22 °F to +158 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +75 °C (-40 °F to +167 °F) |
| Cable Qualification Standards | ANSI/ICEA S-87-640 EN 187105 |
| Environmental Space | Aerial, lashed Buried |
| Jacket UV Resistance | UV stabilized |
| Water Penetration | 24 h |
| Water Penetration Test Method | FOTP-82 IEC 60794-1 F5 |

Environmental Test Specifications

| | |
|--------------------------------------|--------------------------------------|
| Cable Freeze | -2 °C 28.4 °F |
| Cable Freeze Test Method | FOTP-98 IEC 60794-1 F15 |
| Heat Age | -40 °C to +85 °C (-40 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -30 °C to +60 °C (-22 °F to +140 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

| | |
|---------------------|---------------------------|
| Cable weight | 269 kg/km 180.76 lb/kft |
|---------------------|---------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



Included Products

8107307/DB | D-288-LA-8W-F12NS

DB-8W-LT – LightScope ZWP® Singlemode
Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable