

**AMP-TWIST™ 7<sub>A</sub>S SL JACK. Dust cover replacement.**


**1. INTRODUCTION.**

This document describes dust cover replacement procedure for AMP-TWIST 7<sub>A</sub>S SL Jack. The kit includes 50 coloured dust covers per bag + this application spec. Dust cover related: 1711481-X (depending of colour).


**2. REFERENCE DOCUMENTS.**

Customer drawing (1711441) is available from CommScope.


**3. DUST COVER REPLACEMENT PROCESS.**

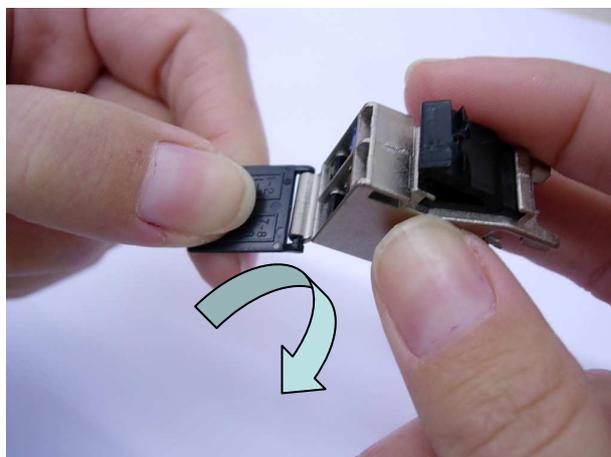

**For disassembling the existing dust cover, pivot it while turning it toward the bottom.**

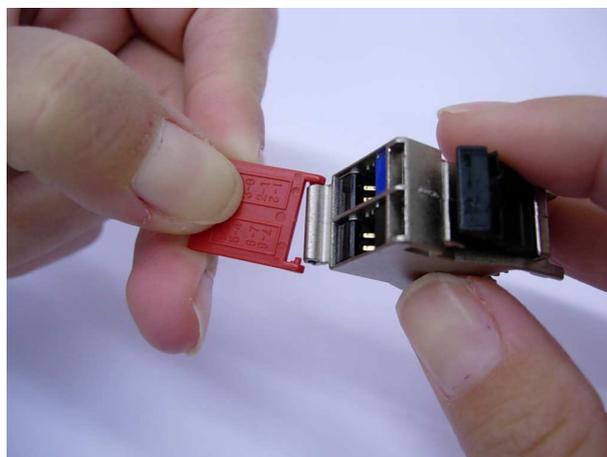

**Take the new one. For assembling the new dust cover, place one side into the hinge and pivot the other side while pushing.**

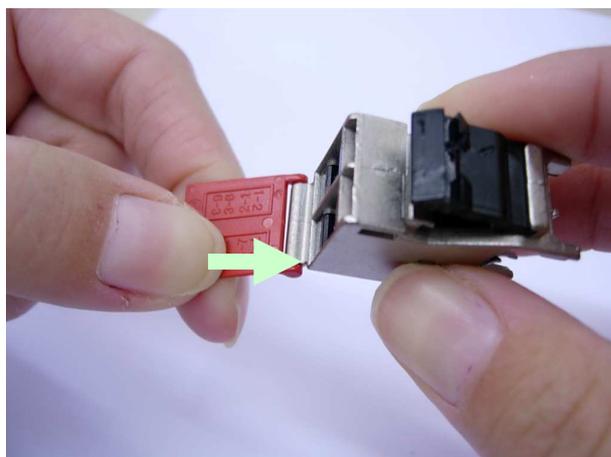

**Check both sides are fully inserted and the dust cover is functional and rotates.**



**It's already finished.**