


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
B	4-30-98	ADD:3/1; NPR C98-62 & EC 0502-0208-98	GG	GG	SH
C	17JUL06	REV-ECD-06-017000	LH	LH	SH
D	20JAN17	REV PER BNS_CD_BRAND	GG	GG	DC

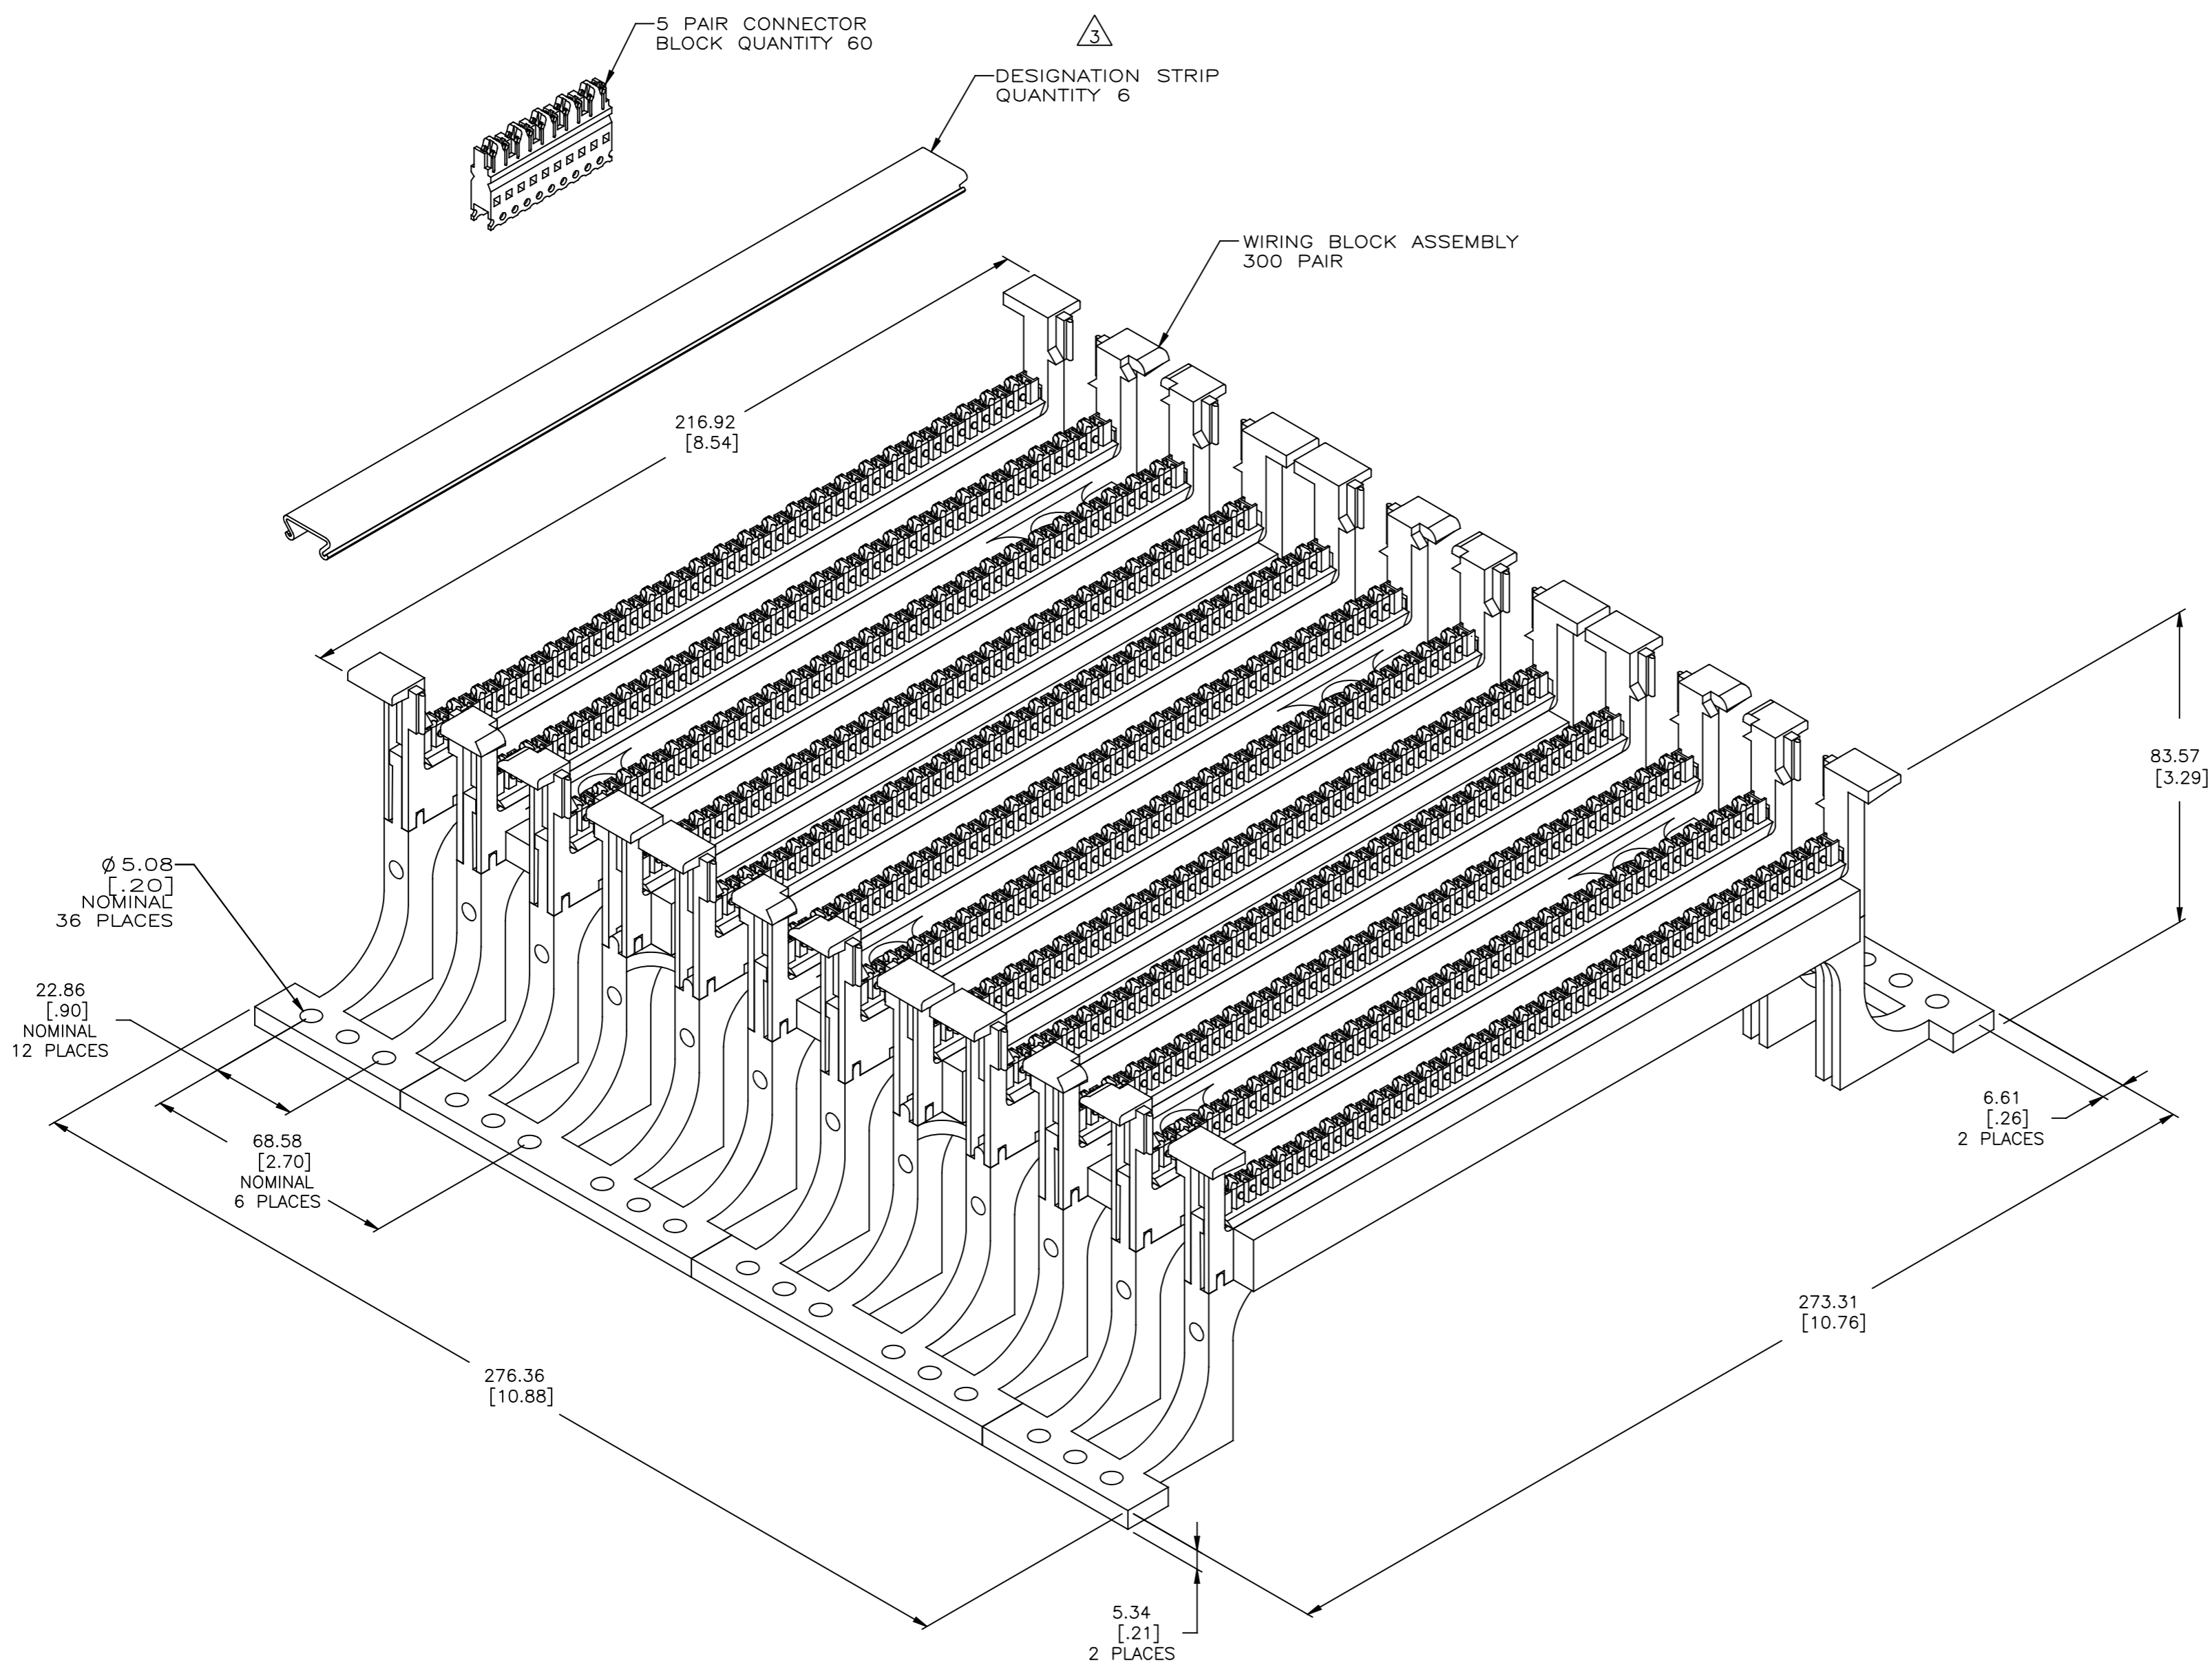

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: WIRING BLOCK ASSEMBLY AND CONNECTOR BLOCK- POLYCARBONATE MOLDING COMPOUND, FLAME RETARDANT, IVORY. DESIGNATION STRIP- RIGID PVC, CLEAR. TERMINALS- PHOSPHOR BRONZE PLATED WITH 3.81µm [.000150] MINIMUM MATTE-TIN OVER 1.27µmm [.000050] MINIMUM NICKEL UNDERPLATE.
- 3 WHITE, DESIGNATION STRIP LABEL NOT SHOWN, QUANTITY 6.
- 4. PACKAGE ONE KIT PER POLYBAG.
- 5. LACING STRIPS MARKED BLACK EVERY FIFTH PAIR.
- 6 SEE RESTRICTED CUSTOMER DRAWING 3-569446-1.

569446-1  
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SMITH 9-19-95	COMMSCOPE, INC.	
DIMENSIONS: INCHES		CHK B. FOX 11-01-95	NAME D. WILLIS 11-01-95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO RESTRICTED TO		
0 PLC ± -	1 PLC ± -	110 CROSS CONNECT KIT, 300 PAIR, WITH LEGS, 5 PAIR CONNECTOR BLOCK		
2 PLC ± -	3 PLC ± -	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
4 PLC ± -	FINISH ± -	A1 - C=569446		
MATERIAL	ANGLES	WEIGHT CUSTOMER DRAWING		
2	2	SCALE 1:1 SHEET 1 OF 1 REV D		