ATTEN-NMNF-3

N-6dB

Product Classification

Product Type	Coax attenuator	
General Specifications		
Connector Interface	N Female N Male	
Outer Contact Plating	Trimetal	
Plating	Nickel	
Dimensions		
Length	70 mm 2.756 in	
Diameter	16 mm 0.63 in	

Inline Attenuator, N-m/N-f, 3 dB


Page 1 of 3

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: December 8, 2020



ATTEN-NMNF-3

Outline Drawing

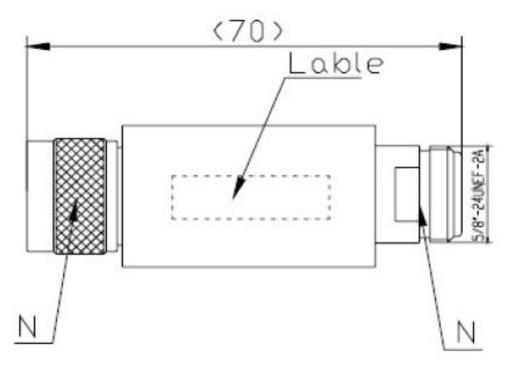

Electrical Specifications

Input Power, PEP, maximum	250 W
Input Power, RMS, maximum	2 W
Return Loss, minimum	20 dB
Attenuation	3 dB
Attenuation Tolerance	±0.5 dB
Impedance	50 ohm
Operating Frequency Band	DC - 3000 MHz

Material Specifications

Dielectric Material	PTFE
Material Type	Brass
Inner Contact Plating	Gold

Environmental Specifications

Operating Temperature

-40 °C to +100 °C (-40 °F to +212 °F)

Page 2 of 3

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: December 8, 2020



ATTEN-NMNF-3

Packaging and Weights

Weight, net

77 g | 0.17 lb

Page 3 of 3

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: December 8, 2020

