

CA166C2

Base Product

GigaSPEED X10D® Keystone HGS620 to Keystone HGS620 on 3291 Low Smoke Zero Halogen Cable F/UTP Pre-terminated Cord

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	SYSTIMAX®
Product Type	Twisted pair patch cord
Product Brand	GigaSPEED X10D®
Product Series	CA
Ordering Note	Cords < 1 m are valid elements for use in a channel or as an equipment interconnect but due to their limited length are not guaranteed to meet component compliance requirements that were developed to assess the quality of longer cords Cords > 1 m are authorized for use in channels and are an effective standalone method used to connect active devices

General Specifications

ANSI/TIA Category	6A
Cable Type	F/UTP (shielded)
Conductor Type	Solid
Information Outlet Color	Black
Interface, Connector A	Information outlet
Interface Feature, connector A	Standard
Interface, Connector B	Information outlet
Interface Feature, connector B	Standard
Jacket Color	White
Pairs, quantity	4
Transmission Standards	IEEE 802.3bt Type 4
Wiring	T568B

Dimensions

Cable Assembly Length Range (m)	1 – 100
Cable Assembly Length Range (ft)	1 – 328
Diameter Over Jacket	7.52 mm 0.296 in

CA166C2

Compatible Conductor Gauge, solid

23 AWG

Wiring Diagram

	Connector A	Connector B
Position 1	White/Orange	White/Orange
Position 2	Orange	Orange
Position 3	Lt. Green	Lt. Green
Position 4	Blue	Blue
Position 5	Lt. Blue	Lt. Blue
Position 6	Green	Green
Position 7	Lt. Brown	Lt. Brown
Position 8	Brown	Brown

Electrical Specifications

dc Resistance, maximum 0.3 ohm

Safety Voltage Rating 300 V

Ordering Tree

CA -

Outlet Color

0	Not applicable
1	Black
2	Blue
3	Gray
4	Green
5	Ivory
6	Orange
7	Red
8	White
9	Yellow
B	Lilac

Jacket Color

1	Black
2	Light blue
3	Dark gray
4	Spring green
5	Ivory
6	Orange
7	Red
8	White
9	Yellow
B	Lilac
C	Gray
K	Pink
L	Violet
M	Green
Z	Blue

UOM

11	F	Foot
	M	Meter
	N	Inch
	C	Centimeter

Length

12

Notes

- Cords > 1m are authorized for use in channels and are an effective standalone method used to connect active devices
- Cords < 1m are also valid elements for use in a channel or as an equipment interconnect but due to their limited length are not guaranteed to meet component compliance requirements that were developed to assess the quality of longer cords

CA166C2

Material Specifications

Contact Plating Material	Precious metals
Material Type	Copper alloy Polycarbonate

Mechanical Specifications

Plug Insertion Life, minimum	750 times
Plug Retention Force, minimum	133 N 29.9 lbf

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flammability Rating	UL 94 V-0
Safety Standard	ETL cETL

Packaging and Weights

Packaging quantity	1
---------------------------	---


Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

760139873 3291B WHT C6A 4/23 F/UTP R3000	-	GigaSPEED X10D® 3291B Category 6A F/UTP Cable, low smoke zero halogen, white jacket, 4 pair count, 3000 ft (914 m) length, reel
--	---	---

760139873 | 3291B WHT C6A 4/23 F/UTP R3000



GigaSPEED X10D® 3291B Category 6A F/UTP Cable, low smoke zero halogen, white jacket, 4 pair count, 3000 ft (914 m) length, reel

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	SYSTIMAX®
Product Type	Twisted pair cable
Product Brand	GigaSPEED X10D®


General Specifications

Product Number	3291B
ANSI/TIA Category	6A
Cable Component Type	Horizontal
Cable Type	F/UTP (shielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Drain Wire Type	Solid
Jacket Color	White
Pairs, quantity	4
Separator Type	Isolator
Transmission Standards	ANSI/TIA-568.2-D

Dimensions

Cable Length	914.4 m 3000 ft
Cable Length Tolerance	±5%
Diameter Over Jacket, nominal	7.518 mm 0.296 in
Jacket Thickness	0.508 mm 0.02 in
Conductor Gauge, singles	23 AWG
Drain Wire Gauge	26 AWG

Cross Section Drawing

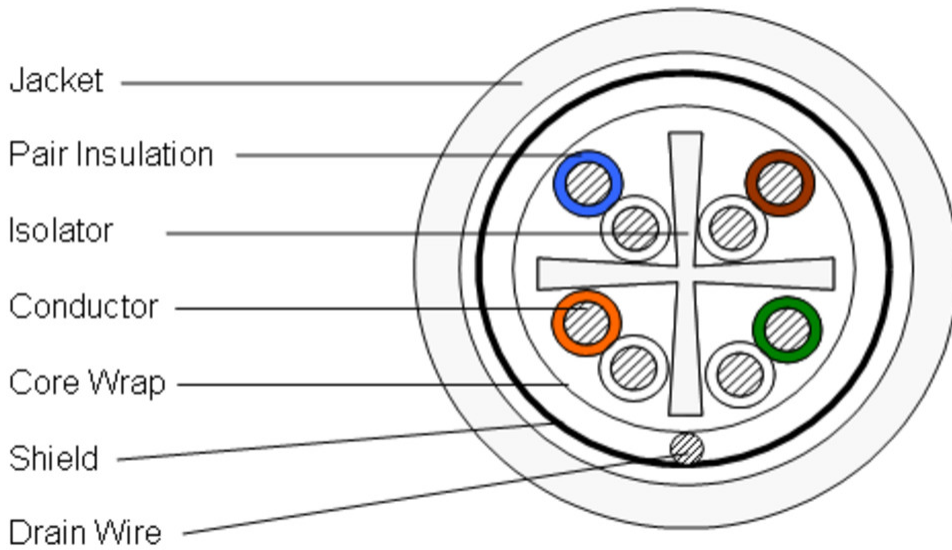

Electrical Specifications

dc Resistance Unbalance, maximum	4 %
dc Resistance, maximum	8 ohms/100 m 2.438 ohms/100 ft
Mutual Capacitance at Frequency	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	69 %
Operating Frequency, maximum	500 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
Segregation Class	d

Material Specifications

Conductor Material	Bare copper
Drain Wire Material	Tinned copper
Insulation Material	Polyolefin
Jacket Material	Low Smoke Zero Halogen (LSZH)
Separator Material	Polyolefin
Shield (Tape) Material	Polyester/Aluminum shield

Mechanical Specifications

760139873 | 3291B WHT C6A 4/23 F/UTP R3000

Pulling Tension, maximum 11.34 kg | 25 lb

Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Acid Gas Test Method	IEC 60754-2
EN50575 CPR Cable EuroClass Fire Performance	Dca
EN50575 CPR Cable EuroClass Smoke Rating	s2
EN50575 CPR Cable EuroClass Droplets Rating	d2
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-3-22
Smoke Test Method	IEC 61034-2

Packaging and Weights

Cable weight	52.309 kg/km 35.15 lb/kft
Packaging Type	Reel

Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

