


T-100-UW-NM

Termination Load, 0–6000 MHz



This product will be discontinued on: November 15, 2022

Replaced By:

T-100-UW-43-M

Termination Load, 0–6000 MHz

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Product Type

Termination Load

General Specifications

Device Type

Termination Load

Application

Indoor/Outdoor

Color

Black

Inner Contact Plating

Silver

Interface

N Male

Outer Contact Plating

Trimetal

Dimensions

Height

89 mm | 3.504 in

Width

140 mm | 5.512 in

Length

190 mm | 7.48 in

Electrical Specifications

Average Power, maximum

100 W

Impedance

50 ohm

Operating Frequency Band


0 – 6000 MHz

T-100-UW-NM

VSWR

1.2

Derating Curve

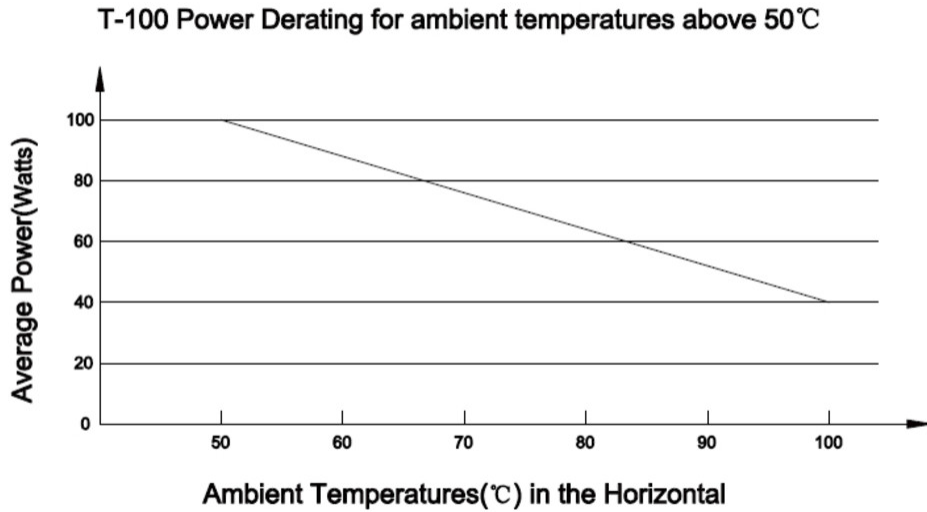

Environmental Specifications

Operating Temperature	-25 °C to +50 °C (-13 °F to +122 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP65

Packaging and Weights

Height, packed	160 mm 6.299 in
Width, packed	235 mm 9.252 in
Length, packed	380 mm 14.961 in
Weight, gross	2.45 kg 5.401 lb
Weight, net	2 kg 4.409 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

T-100-UW-NM

