


# 64623447-288MLT | O-288-LD-8M-M24BL/17G /PE/PA

---



## 288 Core OS2 Outdoor Mini Loose Tube - Double Jacket

### Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber OSP cable
<b>Product Series</b>	O-LN

### General Specifications


<b>Cable Type</b>	Stranded loose tube
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-filled
<b>Jacket Color</b>	Black
<b>Jacket Marking</b>	Meters
<b>Subunit, quantity</b>	24
<b>Fibers per Subunit, quantity</b>	12
<b>Total Fiber Count</b>	288

### Dimensions

<b>Buffer Tube/Subunit Diameter</b>	1.75 mm   0.069 in
<b>Diameter Over Jacket</b>	10.3 mm   0.406 in

### Representative Image

# 64623447-288MLT | O-288-LD-8M-M24BL/17G /PE/PA

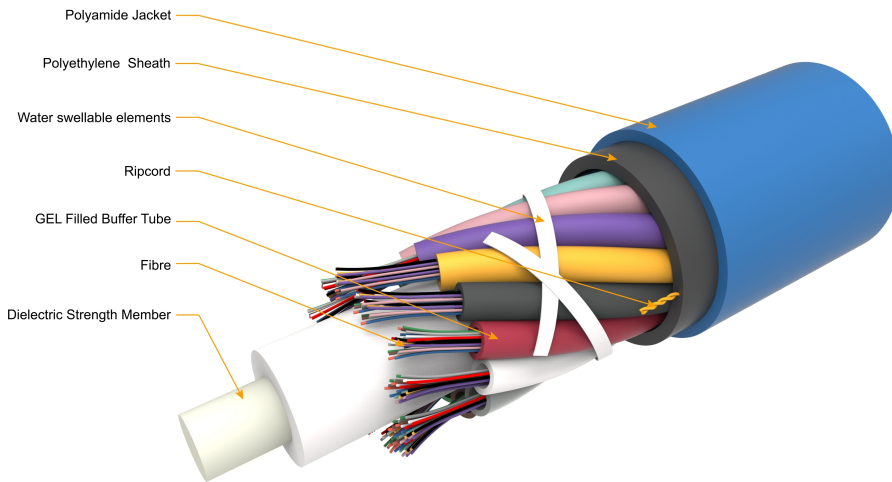

## Material Specifications

**Jacket Material** Nylon | PE

## Mechanical Specifications

**Minimum Bend Radius, loaded** 220 mm | 8.661 in  
**Minimum Bend Radius, unloaded** 110 mm | 4.331 in  
**Tensile Load, short term, maximum** 2000 N | 449.618 lbf  
**Cable Crush Resistance, maximum** 20 N/mm | 114.203 lb/in  
**Compression Test Method** IEC 60794-1 E3  
**Flex** 25 cycles  
**Impact** 1 N-m | 8.851 in lb  
**Impact Test Method** IEC 60794-1 E4  
**Strain Test Method** IEC 60794-1-21 E1  
**Twist** 10 cycles  
**Twist Test Method** IEC 60794-1 E7

## Optical Specifications

**Fiber Type** G.652.D

## Optical Specifications, Wavelength Specific

**Attenuation, maximum** 0.21 dB/km @ 1,550 nm | 0.35 dB/km @ 1,310 nm

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +50 °C (+32 °F to +122 °F)
<b>Operating Temperature</b>	-10 °C to +70 °C (+14 °F to +158 °F)
<b>Storage Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Environmental Space</b>	Buried   Underground (duct)
<b>Jacket UV Resistance</b>	UV stabilized
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	IEC 60794-1 F5C

## Environmental Test Specifications

<b>Heat Age</b>	0 °C to +85 °C (+32 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-30 °C to +60 °C (-22 °F to +140 °F)
<b>Low High Bend Test Method</b>	IEC 60794-1 E11
<b>Temperature Cycle Test Method</b>	IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	90 kg/km   60.477 lb/kft
---------------------	--------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable