

Fiber Optic Cable, Indoor Zero Halogen, Dual listed, Duplex Zip Cord

- CommScope's indoor fiber cables are positioned for Data Center or Central Office applications
- Superior mechanical and optical performance with unmatched stability and quality
- Available cable jacket colors: aqua,lime-green, yellow

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-ZC
General Specifications	
Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free

Ordering Tree

Page 1 of 2

©2022 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: March 10, 2022



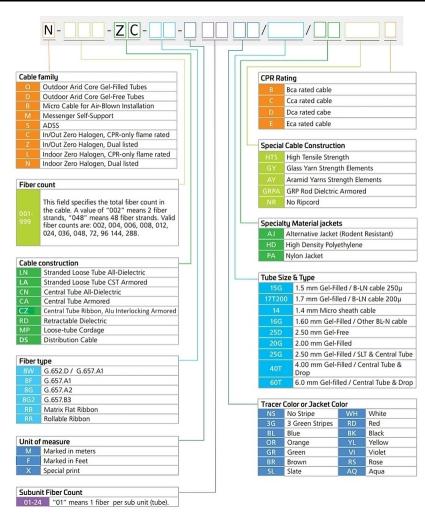

Environmental Specifications

Installation temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

Page 2 of 2



