UGVQPQXTL

Base Product



Ultra Low Loss (ULL) OM5 MPO8 (Non-Pinned) to MPO8 (Pinned), Fiber Trunk Cable Assembly, 96-Fiber, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Connector A, quantity 12

Color, boot A Gray

Color, connector A Lime green

Connector B, quantity 12
Color, boot B Gray

. . . ,

Color, connector BLime greenConstruction TypeStrandedFurcation ColorLime green

Interface, Connector A MPO-08/UPC Female

Interface, Connector B MPO-08/UPC Male

Jacket Color Lime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 8

Total Fibers, quantity 96

Dimensions




Breakout Length 22 in

3 - 305 Cable Assembly Length Range (m)

Cable Assembly Length Range (ft) 10 - 999

Ordering Tree

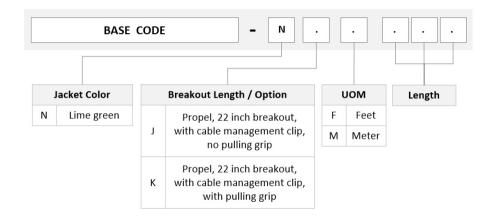

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

OM5, LazrSPEED® **Fiber Type**

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Classification **Agency ANATEL** Compliant



ISO 9001:2015



COMMSCOPE®

Designed, manufactured and/or distributed under this quality management system

UGVQPQXTL

Included Products

760248195 – Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, 96 fiber multi-unit with 8 fiber subunits, P-096-MP-5G-F08AQ/20T Multimode OM5, Gel-free, Feet jacket marking, Aqua jacket color

860659020 – MPO-08, ULTRA LOW LOSS, MALE, OM5, LIME-GREEN, 2mm 860659026 – MPO-08, ULTRA LOW LOSS, FEMALE, OM5, LIME-GREEN, 2mm