


U4X2XLUVF

Base Product

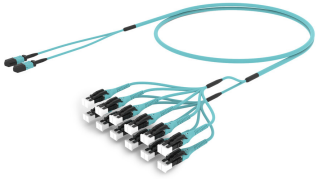

Ultra Low Loss (ULL) OM4 MPO24 (Pinned) to LC/UPC Uniboot, Fiber Trunk Cable Assembly, 24-Fiber, Low Smoke Zero Halogen (LSZH), B2ca

Product Classification

Regional Availability	Europe
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL

General Specifications

Color, boot A	Red
Color, connector A	Aqua
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Aqua
Interface, Connector A	MPO-24/UPC Male
Interface, Connector B	MPO-24/UPC Male
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	24
Total Fibers, quantity	24

Dimensions

Breakout Length	33 in
Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

Ordering Tree

U4X2XLUVF



Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

EN50575 CPR Cable EuroClass Fire Performance B2ca

Environmental Space Dual Rated LSZH/Riser | Indoor

U4X2XLUVF


Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

- | | | |
|---------------------------------------|---|---|
| 760248638
N-024-MP-5K-F24AQ/30T/B2 | - | Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 24-fiber, 3.0mm subunits, Gel-free, Multimode OM4, Feet jacket marking, Aqua jacket color, B2ca flame rating |
| 860658161 | - | 2.0 mm LC/UPC Uniboot GEN 1.5, Aqua |



Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 24-fiber, 3.0mm subunits, Gel-free, Multimode OM4, Feet jacket marking, Aqua jacket color, B2ca flame rating

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Aqua
Jacket Marking	Feet
Subunit, quantity	1
Total Fiber Count	24

Dimensions

Buffer Tube/Subunit Diameter	3 mm 0.118 in
Diameter Over Jacket	6.4 mm 0.252 in

Representative Image

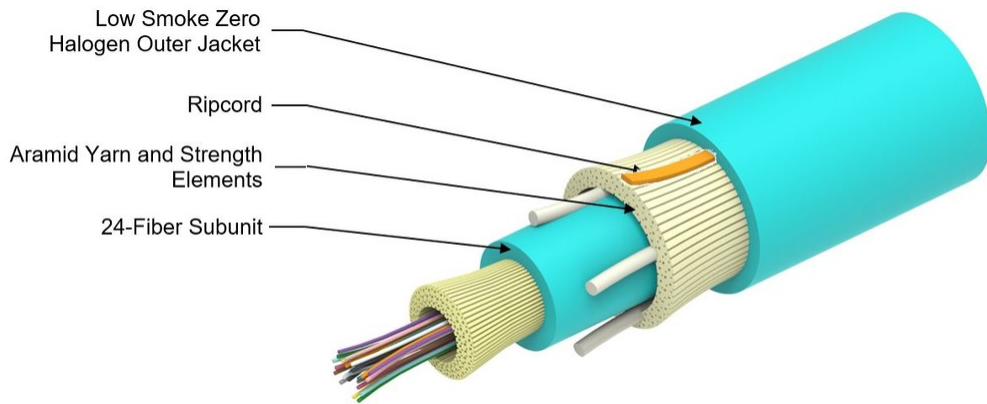

Mechanical Specifications

Minimum Bend Radius, loaded	96 mm 3.78 in
Minimum Bend Radius, unloaded	64 mm 2.52 in
Tensile Load, long term, maximum	200 N 44.962 lbf
Tensile Load, short term, maximum	667 N 149.948 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	445 m 1,459.974 ft

Optical Specifications

Fiber Type	OM4, LazrSPEED® 550
-------------------	---------------------

Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	0 °C to +60 °C (+32 °F to +140 °F)

760248638 | N-024-MP-5K-F24AQ/30T/B2

Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	B2ca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60754-2 IEC 61034-2

Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	45.9 kg/km 30.843 lb/kft
---------------------	----------------------------

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable



2.0 mm LC/UPC Uniboot GEN 1.5, Aqua

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Fiber connector boot

General Specifications

Color	Aqua
Compatible Interface	LC
Ferrule Geometry	Flat

Dimensions

Compatible Cable Diameter	2 mm 0.079 in
----------------------------------	-----------------

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM4
Attenuation, nominal	0.13 dB
Insertion Loss, maximum	0.15 dB
Return Loss, minimum	35 dB

Packaging and Weights

Packaging Type	Bag
-----------------------	-----

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

860658161

UK-ROHS

Compliant

