### CSC3-M5A1A1BCOOO



# NOVUX™ CSC100 Compact Fiber Closure, splice only, no adapters, no splitters, Mobra, black

- CommScope's new NOVUX™ non-hardened compact closure designed for the drop (access) network
- Configurable as splice only or connectorized solution
- Octopus™ gel compatible with high end environmental specifications for aerial, pedestal, underground and direct buried applications
- Available in black (RAL 9005) and gray (RAL 7035)
- NOVUX™ compact closures come with a QR code link to product documentation and C-track
- Modular design compatible with a range of accessories such as mounting brackets, cable retentions, grounding, etc.
- Removable inner body with 360-degree access for ease of fiber installation

#### **Product Classification**

Regional Availability Asia | EMEA | Latin America | North America

Portfolio CommScope®

**Product Type** Single-ended, rectangular fiber closure

Product Brand NOVUX™

Product Series CSC 100

#### General Specifications

**Cable Ports Quantity, total** 3 round ports + 6 multi-out ports (12 cables)

Cable Sealing TypeCompressed gelClosure Sealing TypeHinged with latch

Closure Style Single-ended

**Color** Black

Mounting Pole | Wall

Port Type No adapter

Port, quantity 0

**Splitter Type** No splitter

Splitter, quantity 0

**Dimensions** 

**Height** 284 mm | 11.181 in




**Width** 117 mm | 4.606 in


**Depth** 77 mm | 3.031 in



### Dimension Drawing

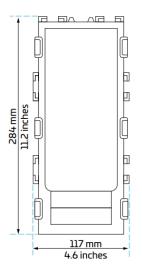






### Port Configuration

Position		Cable diameter	
	mm	Inches	
Feeder cable	≤14	≤ 0.55	
Branch cable	≤12	≤ 0.47	
Single drops	≤ 8 (flat cable: 8 x 4,5)	≤ 0.32 (flat cable: 0.32 x 0.18)	
Dual drops	≤ 6,2	≤ 0.25	

### Ordering Tree

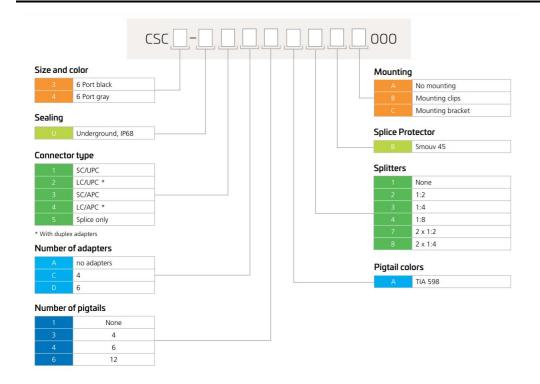

#### **Environmental Specifications**

Environmental Space Outdoor

**UV Resistance** UV stabilized

### Packaging and Weights

**Included** Mounting hardware

Packaging quantity

Packaging Type Box | Carton

#### Regulatory Compliance/Certifications

#### Agency Classification

CHINA-ROHS Below maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant

TL 9000:2016 (R6) Compliant to this quality management practice

UK-ROHS Compliant







