


# FPS-CMPP2PJJ



FDH 4000/5000, 2X16 splitter, SC/APC

## Product Classification


Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Splitter module
Product Series	FDH 4000   FDH 5000   FPS

## General Specifications

Device Type	Plug-and-play module
Functionality	Splitting
Application	For use in FDH 4000 and 5000 cabinets
Circuits, quantity	1
Distribution Type	2 x 16 splitter
Interface, front	SC/APC
Interface, Input	SC/APC
Interface, Output	SC/APC
Module Color	Black
Split Ratio	Symmetrical
Splitter, quantity	1

## Ordering Tree

# FPS-CMPP2PJJ

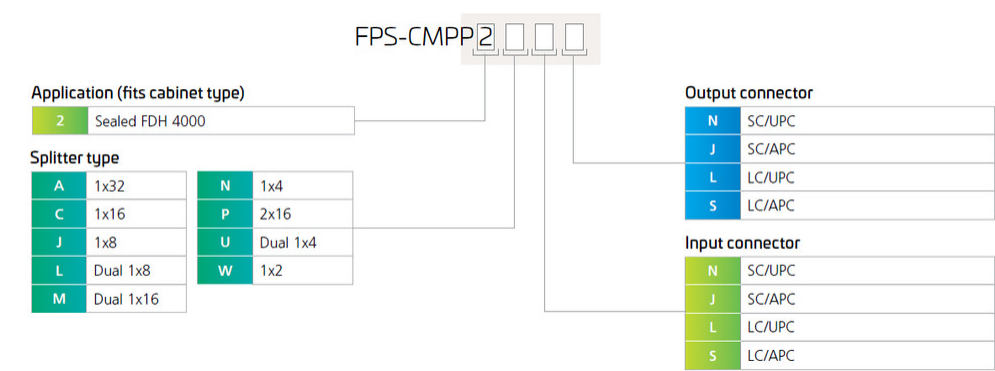

## Optical Specifications

Directivity, minimum	60 dB
Polarization Dependent Loss, maximum	0.4 dB
Uniformity, maximum	2 dB
Wavelength Range	1260–1635 nm
Insertion Loss, Splitter, maximum	14.1 dB
Insertion Loss, Splitter, typical	12.9 dB
Return Loss, Splitter, minimum	55 dB

## Packaging and Weights

Packaging quantity	1
--------------------	---