

Fiber Optic Power Reducing Build Out Attenuator, singlemode LC/UPC, 12dB, blue

- Designed to reduce or balance the power in passive optical networks
- Insertable between the connector and the adapter and therefore suited for distribution frames, cabinets and boxes
- High system flexibility because of wave-length independency and polarization insensitivity

## OBSOLETE

This product was discontinued on: November 30, 2021


## Product Classification

<b>Regional Availability</b>	Latin America   North America
<b>Product Type</b>	Fiber attenuator
<b>Product Series</b>	FOA

## General Specifications

<b>Color</b>	Blue
<b>Interface</b>	LC/UPC

## Outline Drawing

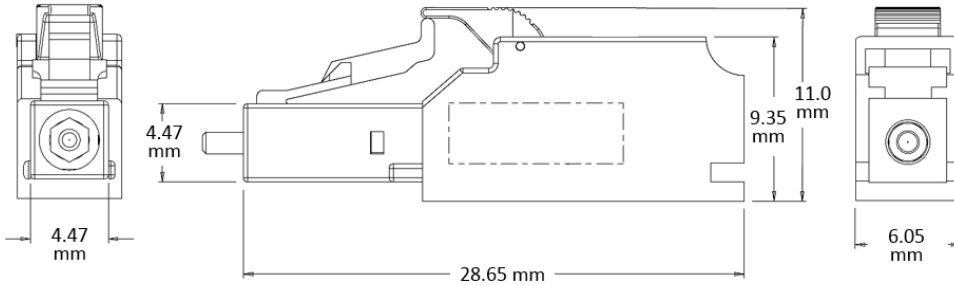

## Optical Specifications

<b>Fiber Mode</b>	Singlemode
<b>Fiber Type</b>	G.652.D
<b>Attenuation, nominal</b>	12 dB
<b>Operating Wavelength</b>	1430 – 1625 nm
<b>Optical Components Standard</b>	GR-910
<b>Optical Power, maximum</b>	250 mW
<b>Return Loss, minimum</b>	40 dB

## Environmental Specifications

<b>Operating Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Storage Temperature</b>	-40 °C to +80 °C (-40 °F to +176 °F)